

LOCATION MAP

UTILITIES

WATER - SAWS
SEWER - SAWS
ELECTRIC - C.P.S.B.

ZONING

R-5

LAND USE

SINGLE FAMILY

TOTAL LAND AREA

97.39 ACRES

APPROXIMATE UNIT SCHEDULE

UNIT	AREA	LOTS	DENSITY
UNIT-1	25.54 ACRES	108 LOTS	4.23 UNITS/ACRES
UNIT-2	20.64 ACRES	87 LOTS	4.22 UNITS/ACRES
UNIT-3	13.55 ACRES	56 LOTS	4.13 UNITS/ACRES
UNIT-4	14.78 ACRES	74 LOTS	5.01 UNITS/ACRES
UNIT-5	16.75 ACRES	96 LOTS	5.73 UNITS/ACRES
UNIT-6	6.13 ACRES	30 LOTS	4.89 UNITS/ACRES
SUBTOTAL:	97.39 ACRES	451 LOTS	4.63 UNITS/ACRES

PARK AND OPEN SPACE REQUIREMENTS:

PARK LAND/OPEN SPACE REQUIRED = 451 LOTS/114 ACRES PER LOT = 3.96 ACRES
THE PARK FEE FOR THE OVERALL CHESTNUT SPRINGS DEVELOPMENT WAS PAID AT THE TIME OF CHESTNUT SPRINGS UNIT 1 PLAT RECORDATION.

NOTE: IN ACCORDANCE WITH UDC 35-412(g)(2) THIS AMENDMENT QUALIFIES AS MINOR. THE AMENDMENTS ARE AS FOLLOWS:
• CHANGES TO THE PHASING OF THE PROPOSED DEVELOPMENT HAVE BEEN REVISED WHILE THE USE AND OVERALL GEOGRAPHIC LAND AREA HAS REMAINED THE SAME.
• A REDUCTION IN THE NUMBER OF PROPOSED PLATTED LOTS FROM 485 TO 451 DECREASING THE OVERALL RESIDENTIAL DENSITY.

GENERAL NOTES

- ALL STREETS SHOWN HEREIN ARE CONVENTIONAL PUBLIC LOCAL TYPE "A" WITH 50' RIGHT OF WAY AND 28' OF PAVEMENT, UNLESS OTHERWISE INDICATED.
- A 4 FT. WIDE SIDEWALK ADJACENT TO THE CURB TO BE PROVIDED FOR PEDESTRIAN ACCESS, ALONG ALL PROPOSED STREETS.
- A ONE FOOT VEHICULAR NON-ACCESS EASEMENT WILL BE REQUIRED WITHIN ALL SINGLE FAMILY RESIDENTIAL LOTS ADJACENT TO AN ARTERIAL OR COLLECTOR STREETS.
- R.O.W. DEDICATION TO COMPLY WITH MAJOR THOROUGHFARE PLAN.
- TYPICAL LOT SIZES RANGE FROM 45' X 65' X 100' TO 120'. LOT SIZES MAY CHANGE DEPENDING ON MARKET DEMAND BASED ON ZONING REQUIREMENTS.
- A MINIMUM OF 2 OFF-STREET PARKING SPACES IS PROVIDED FOR EACH RESIDENTIAL LOT.
- PROPERTY LIES INSIDE CITY OF SAN ANTONIO LIMITS, BEXAR COUNTY, TEXAS.
- PROPERTY LIES INSIDE NORTHSIDE INDEPENDENT SCHOOL DISTRICT.
- NO FEMA FLOODPLAINS ARE WITHIN LIMITS OF PROJECT BASED ON FIRM PANEL 48029C0416E EFFECTIVE 2/16/1996.
- SITE IS NOT OVER OR WITHIN THE EDWARDS AQUIFER RECHARGE ZONE.
- BEARING REFERENCE IS THE SOUTH R.O.W. LINE OF VIEW WEST DRIVE AS SHOWN ON THE SUBDIVISION PLAT OF WESTLAKES SUBDIVISION UNIT 11 RECORDED IN VOLUME 9538, PAGE 27. (N 65° 52' 19" W)

LINE	LENGTH	BEARING
L1	270.24'	N65°52'19"W
L2	86.00'	S24°07'41"W
L3	281.02'	S65°52'19"E
L4	419.59'	S76°14'21"W
L5	60.93'	N09°21'56"W
L6	128.15'	S70°16'20"W


CURVE	DELTA	RADIUS	LENGTH	TANGENT	CHORD BEARING	CHORD
C1	7°00'00"	2543.00	310.68	155.54	N88°24'25"E	310.49
C2	31°00'00"	1857.00	896.53	459.53	S79°35'35"E	885.63
C3	6°46'56"	3857.00	456.57	228.55	S80°42'06"E	456.30
C4	86°49'04"	25.00	37.88	23.65	S13°35'57"E	34.36
C5	8°44'13"	3289.47	501.61	251.29	S25°08'37"W	501.12
C6	93°20'16"	25.00	40.73	26.50	S67°27'06"W	36.37
C7	84°17'19"	25.00	36.78	22.62	S23°43'40"E	33.55
C8	15°25'34"	3289.47	885.65	445.52	S10°42'13"W	882.98
C9	45°33'39"	700.00	556.63	293.97	N86°56'52"W	542.08

LEGEND

BOUNDARY
UNIT BOUNDARY
ESMT
EASEMENT




SCALE: 1"=200'




(IN FEET)
1 inch = 200 ft.

GRAPHIC SCALE

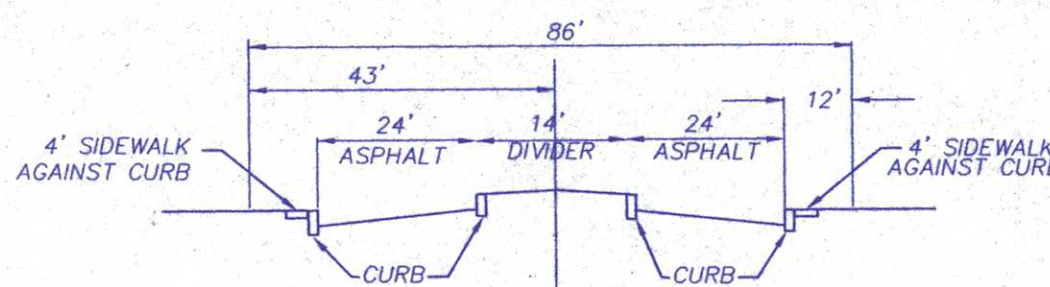


NON-STANDARD STREET SECTIONS

COLLECTOR --- 2-24' Asphalt Section in 86' Right-of-Way
(VIEW WEST DRIVE)

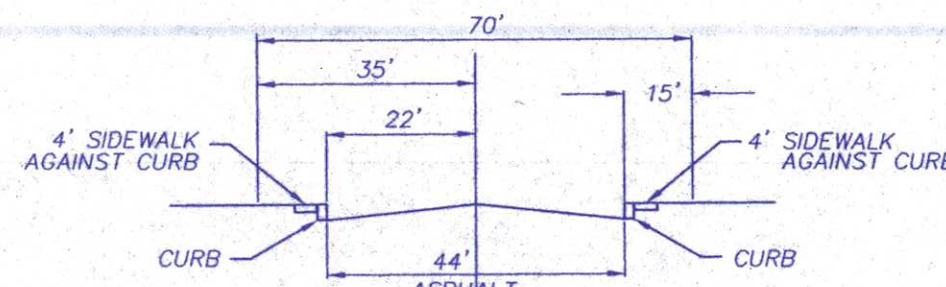

COLLECTOR STREET SECTION

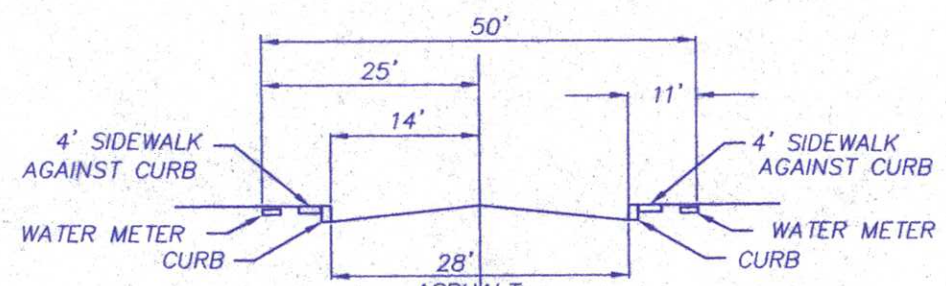

LOCAL "A" STREET SECTION

DEV. SERVICES

2005 JUN 30 A 10:26

PLAN HAS BEEN ACCEPTED BY

COSA

7/17/05 783A

(date) (number)

If no plats are filed, plan will expire

On 1/6/07

1st plat filed on

DEVELOPER/OWNER

FIELDSTONE COMMUNITIES
21232 GATHERING OAK, STE 103
SAN ANTONIO, TEXAS 78258
210-491-7627

ENGINEER

VICKREY & ASSOCIATES, INC.
12940 COUNTRY PARKWAY
SAN ANTONIO, TEXAS 78216
210-349-3271

DATE PREPARED: 12/19/03
REVISED DATE: 06/27/05

MDP ID # 783-A

NO.	DATE	DESCRIPTION	REVISIONS
1	6/27/05	ADDED CLOSING, REVISED SIGNATURE BLOCK, REVISED REVISION	
2	5/19/05	REVISED UNIT SCHEDULE, REVISED LOT COUNTS & AREA	
3	3/16/04	REVISED PARK LAND	
4	3/05/04	DELETED STREET TO HUNT LANE, ADDED PARK LAND REQUIREMENTS	
5	2/10/04	REVISED STREETS TO COLLECTORS, ADDED DRAIN ESMTS, UPDATED ADJOINING DRIVEWAYS & PLATS	
6	1/26/04	ADDED DRAIN ESMTS, UPDATED ADJOINING DRIVEWAYS & PLATS	
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			
101			
102			
103			
104			
105			
106			
107			
108			
109			
110			
111			
112			
113			
114			
115			
116			
117			
118			
119			
120			
121			
122			
123			
124			
125			
126			
127			
128			
129			
130			
131			
132			
133			
134			
135			
136			
137			
138			
139			
140			
141			
142			
143			
144			
145			
146			
147			
148			
149			
150			
151			
152			
153			
154			
155			
156			
157			
158			
159			
160			
161			
162			
163			
164			
165			
166			
167			
168			
169			
170			
171			
172			
173			
174			
175			
176			
177			
178			
179			
180			
181			
182			
183			
184			
185			
186			
187			
188			
189			
190			
191			
192			
193			
194			
195			
196			
197			
198			
199			
200			
201			
202			
203			
204			
205			
206			
207			
208			
209			
210			
211			
212			
213			
214			
215			
216			
217			
218			
219			
220			
221			
222			
223			
224			
225			
226			
227			
228			
229			
230			
231			
232			
233			
234			
235			
236			
237			
238			
239			
240			
241			
242			
243			
244			
245			
246			
247			
248			
249			
250			
251			
252			
253			
254			
255			
256			
257			
258			
259			
260			
261			
262			
263			
264			
265			
266			
267			
268			
269			
270			
271			
272			
273			
274			
275			
276			
277			
278			
279			
280			
281			
282			
283			
284			
285			
286			
287			
288			
289			
290			
291			
292			
293			
294			
295			
296			
297			
298			
299			
300			
301			
302			
303			
304			
305			
306			
307			
308			
309			
310			
311			
312			
313			
314			
315			
316			
317			
318			
319			
320			
321			
322			
323			
324			
325			
326			
327			
328			
329			
330			
331			
332			
333			
334			
335			
336			</



CITY OF SAN ANTONIO

July 7, 2005

Mr. Frederick J. McNealy, P.E.

Vickrey & Associates, Inc.
12940 Country Parkway
San Antonio, TX 78216

Re: Chestnut Springs Subdivision

MDP # 783-A

Dear Mr. McNealy:

The City Staff Development Review Committee has reviewed Chestnut Springs Master Development Plan, M.D.P. (Amendment) # 783-A. Please find enclosed a signed copy for your files. Your plan was accepted, however please note the following:

- In consideration of public safety and convenience, excessive grades by reason of topography should be avoided in street layouts and arrangements.
- Development Services, Engineering Section has indicated as part of their conditional approval, The following on-site improvements, as well as, improvements along the project limits are necessary and shall be provided by the developer, on or before the completion of the Chestnut Springs Subdivision, at no cost to the City of San Antonio:
 1. Provide 43 ft. right-of-way from the centerline of Hunt Lane along the frontage of this property.
 2. Construct a southbound right-turn lane on Ingram at the collector entrance to this subdivision.
 3. All interior streets accessing external roadways shall follow all conditions set forth in the Chestnut Springs Master Development Plan.

Mr. McNealy

Page 2

July 7, 2005

4. It should be understood that the submitted TIA is a conceptual plan and therefore this document does not represent an approval for the internal street plan.

- Any access and R.O.W. issues along state facilities will need to be resolved with the Texas Department of Transportation (TXDOT). For information about these requirements you can contact TXDOT at 615-5814.
- This development will need to comply with tree preservation ordinance #85262. For information about these requirements you can contact Tree Preservation at 207-8053.
- It will be expected that you will plat all of the property depicted in your Master Development Plan (M.D.P.) to include floodplains, drainage areas and open space.
- Storm Water Engineering has reviewed the above reference project. Based on the submittal dated January 8, 2004 comments are as follows:

1. This project is eligible for regional storm Water Management Participation (FILO).

The information submitted is based upon the Unified Development Code (UDC) for The City Of San Antonio, as it exists today. If the Code changes between now and when the actual submittal of the plat occurs for the site, the submittal will be reviewed under the latest Code requirements.

Storm Water Engineering is not responsible for informing the engineer when such Code changes occur. This is not a blanket approval for the property to be allowed to pay the Storm Water Participation fee instead of providing on-site detention.

The Watershed Master Planning for the City of San Antonio and Bexar County is ongoing process and is subject to change at any time. Any changes resulting in flooding downstream from the proposed development could alter this department's decision.

Under the conditions as stated in the Storm Water Management Report, this development under today's regulations would be allowed to pay the Storm Water Fee.

- I would encourage you to work closely with the school district, so that they can plan accordingly.

- **Historic Preservation:** The information submitted for the above-referenced request has been reviewed by the San Antonio Historic Preservation Office (HPO) staff according to the city's Historic Preservation and Design Section of the Unified Development Code (Article 6 35-630 to 35-634). The review focused on the possible effects of the proposed platting, but more importantly, on the possible effects of any future development of the subject property, on archaeological resources. Disturbance of any site or removal of artifacts from any site within the city without prior review and written clearance by the City Historic Preservation Office (HPO) and/or the State Historic Preservation Office (SHPO) is a violation of the San Antonio Uniform Development Code and/or the Antiquities Code of Texas. Also, if a federal agency is involved (for example, with funding, licensing, permitting, or oversight) in development or regulation of a property, sites within the property are protected under the National Historic Preservation Act. Both underground and ground level portions of sites are included as well as sites found after clearance is obtained.

The Texas Sites Atlas indicates that no archaeological/architectural sites have been previously identified within the above referenced property. However, staff of the HPO believe there is a **high probability** that the property may contain sites, some of which may be significant. Several historic agricultural complexes and/or early settlement houses may be located within the project area. Thus, before any work that might affect any sites is begun, a qualified professional should conduct an archaeological/architectural investigation of the property. The investigation should be performed according to Archeological Survey Standards for Texas, and any previously identified sites should be reexamined and reevaluated, if any. A list of qualified archaeological consulting firms is available on line at www.c-tx-arch.org. The consultant may need to obtain an antiquities permit from the SHPO prior to starting the investigation. A report of findings should be prepared according to the Council of Texas Archeologists [CTA] Guidelines for Cultural Resource Management Reports and submitted to the HPO for review. Copies of the survey standards and the CTA guidelines may be obtained by calling the SHPO at 512-463-6096 or writing to P.O. Box 12276, Austin, Texas 78711-2276. Law allows both the HPO and SHPO 30 days from receipt for reviews.

If no significant sites are found, after the HPO concurs, development may proceed throughout the property. If significant sites are found or were previously identified, before any construction work occurs near the sites, a plan for avoidance or mitigation must be prepared and submitted to the HPO and/or SHPO for review. Upon concurrence by the CPO, construction work may proceed in areas where sites are not present. When written approval of the site treatment plan is obtained from the HPO, construction work in the remaining areas of the property may proceed according to the plan. If a previously unidentified site is encountered during construction work, activities should be immediately stopped in the vicinity and the HPO notified.

If there are any lands or easements owned or controlled by the State of Texas or any of its political subdivisions within the property, or if there is any federal agency involvement or jurisdiction relating to the property or its development, the THC may require other archaeological compliance efforts additional to those required by the HPO.

Mr. McNealy

Page 4

July 7, 2005


If there are any questions or additional information regarding archaeological sites is needed, please call Historic Preservation at 210-207-7306.

Please note that this action by the committee does not establish any commitment for the provision of utilities, services or zoning of any type now or in the future by the City of San Antonio. If the proposed development is not platted in phases this Master Development Plan M.D.P. will be invalid.

ALL Platting shall comply with the Unified Development Code, Master Plan and Major Thoroughfare Plan for the city of San Antonio.

If you have any questions regarding this matter, please contact Mr. Michael O. Herrera, at (210) 207-7873.

Sincerely,

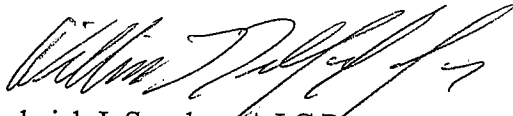

Roderick J. Sanchez, A.I.C.P.

Assistant Director, Development Services

RS/MH Jr.

cc: Sam Dent, P. E., Chief Engineer, DSD-Streets & Drainage
Richard Chamberlin, P.E., Development Services
Arturo Villarreal Jr, P.E. Strom Water Engineering
Ismael B. Segovia, M.A. Planner II, Parks Project Services
Todd Sang, Civil Engineer Assistant, Bexar County